

INOXIL

STAINLESS STEEL SPRAY

CHARACTERISTICS

| | |
|-------------------------|---|
| Basic: | Stainless steel paint in synthetic vehicle. |
| Propellant: | Denatured and odourless hydrocarbons. |
| Colour: | Metallic |
| Drying time: | 5' |
| Film Thickness: | 25-30 micron |
| Temperature resistance: | High |

PROPERTIES

- CFC Free
- Rapid drying

DESCRIPTION


It forms a film which restores and protects all stainless steel surfaces.
It can be overpainted or left as final protection.
It has a good covering power on all metal surfaces.

INSTRUCTIONS OF USE

Clean and degrease the parts to treat. Shake well the can before spraying, and during the application continue occasionally to shake the product to keep it homogeneous. Spray at 25 cm distance. After the use turn upside down the aerosol and spray the product few seconds to dodge the clogging of the valve.
Shelf-life 1 year

PACKAGING

Spray Aerosol ml 400
Box 12 Aerosols
Product Code 11210/04

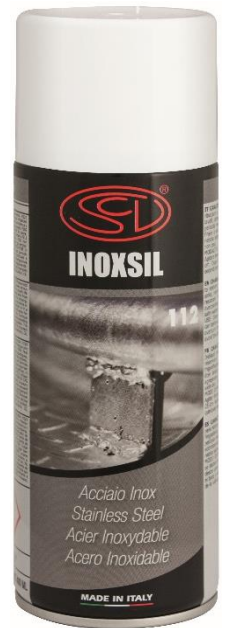

Revision date 16.10.2018

The information and recommendations contained in this document is offered in good faith based on our current knowledge and belief accurate at the date of publication. Nothing herein is to be considered as a warranty, express or otherwise. In all cases, it is the responsibility of the user to determine the applicability of such information or the suitability of any products for their own particular purpose with local legislation and for obtaining the necessary certifications and authorisations. Siliconi Commerciale's sole warranty is that the products will meet its sales specification. The manufacturer cannot be held responsible in case of damages caused by incorrect use of the product.

® indicates a Registered TradeMarks of Siliconi Commerciale. All Rights Reserved.

SILICONI COMMERCIALE® Technical data- sheet

